


NOVALUXE

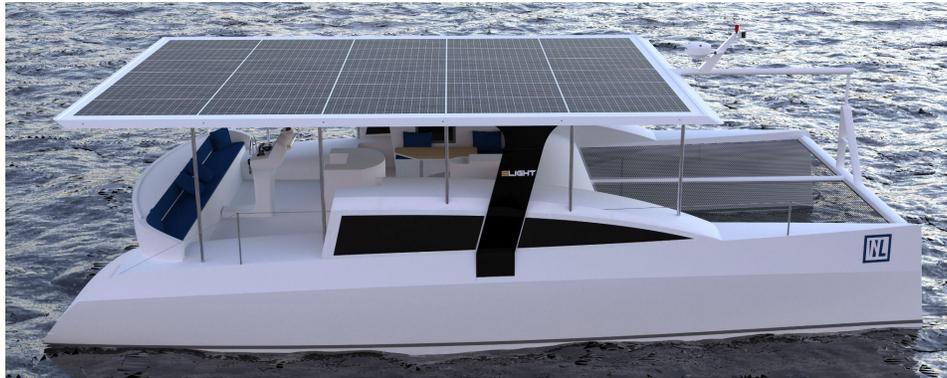

Nova Luxe ELIGHT 40

GENERAL SPECIFICATIONS

PRINCIPAL CHARACTERISTICS

L.W.L 11.90 m
L.O.A 11.90 m
Beam 6.42 m
Draft 0.8 m
Displacement (L.S) 5800 kg
Load carrying cap 4000 kg
Motors 2 x 30 kw

HULL, DECK & BULKHEADS

Using only the highest grade Lloyds approved materials.

- Epoxy resin and multi axial stitched E-glass fabrics
- PVC/Nidacore sandwich vacuum bonded construction
- Reinforcing built-in for all deck fittings and high load areas
- Bulkheads are bonded in place
- Forward water-tight
- compartments
- 2 x GRP doors fitted
- Low aspect keels
- Rudders are fixed
- Mast beam and aft cross-beam with 6 lockers
- Anti-fouling over epoxy osmosis barrier

DECK SALOON

- U-Shaped bar unit
- Forward access to foredeck

AFT DECK

- Dive Platform
- Seating and storage
- 1 x Cold shower
- Lowering di

FOREDECK

- Foredeck with large access hatches and storage
- Anchor locker
- 2 x large trampolines

EXTERIOR

- Steering console with seat
- Seating for 10 people
- Stainless steel guardrail and windscreen

- 7kw Solar Array

INTERIOR MODULES

- All interior modules have; hinges & latches are fitted, and the floor boards have a non-slip finish

STARBOARD HULL

Aft Cabin

- Queen-sized double bunk
- Storage cabinet & overhead locker

Navigation Centre

- Overhead switchboard
- Companionway staircase with stainless steel grab-rail

Head Compartment

- 1 x Stainless steel bathroom sink with locker and vanity cabinet
- 1 x Cold Shower

Forward Cabin

- Single bunk with internal locker
- Stainless steel companionway ladder

PORT HULL

Aft Cabin

- Queen-sized double bunk
- Storage cabinet & overhead locker

Galley

- Galley storage
- Cold sink

Forward Cabin

- Single bunk

- Storage under bunk
- Deck hatch

Head Compartment

- 1 x Stainless steel washbasin
- with locker and vanity cabinet
- 1 x Cold Shower

DECK HARDWARE

Hatches & Port lights

- 4x Lewmar hatches
- 2 x Custom companionway
- hatches Flush Deck
- 8 x Port-lights

Lights

- 1 x Stern light with stainless
- steel guard
- 1 x Port light
- 1 x Starboard light
- 10 x LED strip lights
- 4 x LED in cabins
- 8 x LED down-lights in coach-roof

SAILING INSTRUMENTS

- 1 x Raymarine 9-inch Chartplotter touch
- 1 x VHF with built in DSC
- 1 x Compass to suite zone

PLUMBING

- 2 x Johnson manual bilge pumps with thru deck kits
- 4 x remotely mounted bilge
- pumps Johnson Viking 16
- 2 x bilge pumps for engine room Johnson Ultima 1000
- 4 x Rule float switches with 2 high water alarms
- 4 x Strum box 19mm, 2 x strum box 38mm

- 9 x Straight skin fitting w/hose- tail 19mm
- 2 x Straight skin fitting w/hose- tail 25mm
- 12 x Drain fitting with grid 38 mm
- 13 x Scoop skin fitting 38 mm
- 2 x Vented loops 19 mm
- 2 x Vented loops 38 mm
- 2 x Fore-spar valves 19 mm
- 2 x Fore-spar valve 38 mm
- 2 x Cold faucets for the heads
- 1 x fold down tap to suite SMEV sink for the bar unit
- 1 x 400L stainless steel water tank
- 2 x 100L aluminum fuel tanks
- 2 x Electric flush toilets
- 1 x freshwater pump
- 1 x saltwater deck wash pump

ANCHORS & RIGGING

- 1 x 20 kg primary anchor
- 10 m x 10 mm Anchor chain
- 2 x 10mm Galv. D shackles
- 50m x 16mm Anchor warp
- 1 x 35lb secondary anchor
- 5m x 10mm Anchor chain
- 40m x 16mm Moorings warps
- 5 x DH5 fenders 250 x 800mm
- 7.5 x Fender lanyards 1.5M x 5 x10mm
- 2 x Anchor rollers on individual bases

FORWARD CROSS-BEAM

- Aluminium section, 3/4 ton (175 x 115) with mounting flanges
- Natural anodized
- Seagull striker fitted
- Attachment facilities for spinnaker blocks
- 8mm bolt rope track to attach trampoline
- anchor bridal attachments incorporated on both sides of
- cross beam hull mounts
- 8mm 1 x 19 striker stay including rigging screw
- Welded cleats

- Cross beam brackets

STEERING SYSTEM

- 1 x Brake spinner Commodore 36" S/S wheel
- 1 x Quick release Commodore nut
- 1 x Quick mount 13T bulkhead steerer
- 2 x Single articulated sheave 6"
- 2 x Double flat sheave 6"
- 1 x Commodore 36" S/S wheel
- 1 x 1M S/S roller chain 5/8"P
- 6mm S/S wire
- Swage ends for wire
- Wire rope clamps 6mm
- 2 x PX801 AHFT 10 rose joint 5/8" UNF

STAINLESS STEEL

- 6 x large s/s mooring cleats
- 2 x Chain plates
- 2 x Push pit
- 2 x Gateways
- 2 x Pulpit
- 2 x Rudder stock
- 1 x Transom ladder
- 2 x Transom grab rails
- 1 x Tie bar system
- 1 x Emergency tiller
- 1 x Foredeck access step
- 2 x Coach roof grab rails
- 2 x Forward coach roof grab rails
- 2 x Aft grab rails

ELECTRICS

- 1 x Marine CD/radio player
- Fusion
- 4 x Waterproof speakers Fusion and sub-woofer
- Switch panel with circuit breakers and switches
- 60kw 48v, Propulsion Bank

- 5kw 12v, House bank batteries
- 8 x 330 Watt solar panels with s/s bracket
- Victron Quattro 5kw inverter (second optional)
- 2 x Victron MPPT Solar Converters
- Cabling and conduit
- Battery switches
- Battery monitor
- 4 x ventilating fans


SAFETY EQUIPMENT and Life-Raft / Dinghy

- Liferafts for 40 passengers (SAMSA, USCG or CE approved)
- Safety equipment excluding life jackets

ENGINES

- 2 x QT30 Electric Yacht 48v, 30kw Motor, Liquid Cooled
- 1 x 14kw AC generator, Provides Continuous Speed at 5-6 knots

RANGE

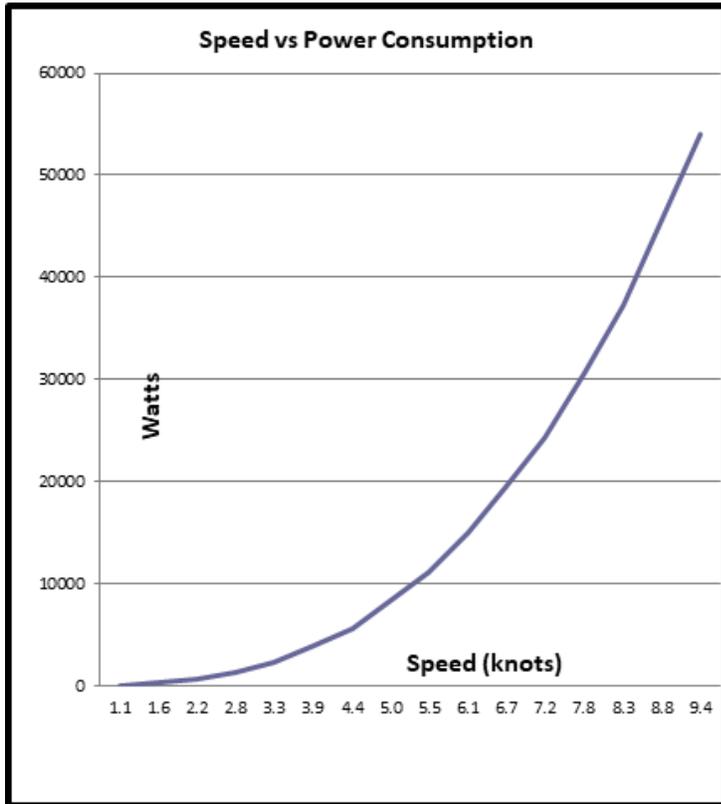

Range (electric) 60kw		
<u>Kts</u>	<u>Hrs</u>	<u>Nm</u>
2.2	66.1	148
2.8	34.2	95
3.3	20.0	66
3.9	11.6	45
4.4	8.0	35
5.0	5.2	26
5.5	3.8	21
6.7	2.1	14
7.8	1.3	10
8.3	1.1	9

BASIC SAIL AWAY PRICE:

R _____

Ex VAT



SEE PRICE LIST WITH OPTIONAL EXTRAS

These are guide line prices only; we can still customise the interior and deck layout according to your requirements. **Note: Due to ongoing development & availability of all listed items, Nova Luxe Yachts reserves the right to change or modify any specifications or standard equipment. Our standard conditions of sale apply. NB: Prices quoted are ex factory and in accordance with our standard Agreement of Sale. Zero VAT if sold to outside of S.Africa**

**Nova Luxe Yachts Tel: +27 21 845 4371 / 2 Cell: Kevin Knight:
+27 71 610 6184**